


■ PRODUCT CHARACTERISTICS

V_{DSS}	750V
$R_{DS(ON)}$ Typ(@ $V_{GS}=18V$)	120m Ω
Q_g @typ	15.3nC
I_D	28A

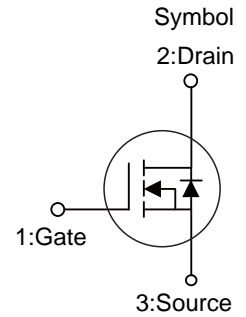

■ APPLICATIONS

- *Switch Mode Power Supplies
- *High Voltage DC/DC Converters
- *Battery Chargers
- *Motor Drivers

■ FEATURE

- *Low On-Resistance With High Blocking Voltage
- *Low Capacitances With High -Speed Switching
- *Low Reverse Recovery(Qrr)
- *Easy to Parallel and Simple to Drive



■ ORDER INFORMATION

Order Codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT75CL160D	TO-252	2500 pieces/Reel

■ ABSOLUTE MAXIMUM RATINGS($T_c=25^{\circ}C$, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DSS}	750	V
Gate-Source Voltage	V_{GSS}	-10/+22	V
Recommended Operation Voltage Of Gate to Source	V_{GSOP}	0/+18	V
Drain Current Continuous($T_c=25^{\circ}C$)	I_D	19.5	A
Drain Current Continuous($T_c=175^{\circ}C$)	I_D	13.5	A
Drain Current Pulsed($T_c=25^{\circ}C$)	I_{DM}	34	A
Power Dissipation	P_D	76	W
Junction Temperature	T_J	+175	$^{\circ}C$
Storage Temperature	T_{STG}	-55~ +175	$^{\circ}C$







■ THERMAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Junction to Case	R_{thJC}	1.97	$^{\circ}C/W$

■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain to Source Breakdown Voltage	V_{DSS}	$V_{GS}=0V, I_D=100\mu A$	750	-	-	V
Drain to Source Leakage Current	I_{DSS}	$V_{DS}=750V, V_{GS}=0V$	-	-	10	μA
Gate to Source Forward Leakage	I_{GSS}	$V_{DS}=0V, V_{GS}=18V$	-	-	250	nA
On characteristics						
Drain to Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=15V, I_D=7A$	-	162	200	m Ω
		$V_{GS}=18V, I_D=7A$	-	120	160	m Ω
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=10mA$	2.7	3.9	4.5	V
Dynamic characteristics						
Gate capacitance	R_g	$V_{AC}=25mV, f=1.0MHz$	-	31	-	Ω
Input Capacitance	C_{iss}	$V_{DS}=40V, V_{GS}=0V$ $f=1.0MHz$	-	451	-	pF
Output Capacitance	C_{oss}		-	89	-	pF
Reverse Transfer Capacitance	C_{rss}		-	3	-	pF
Resistive Switching Characteristics						
Turn-on Delay Time	$t_{d(ON)}$	$I_D=7A, V_{DS}=400V$ $R_G=2.2\Omega, V_{GS}=0/15V$	-	29.2	-	ns
Rise Time	t_r		-	11.7	-	ns
Turn-off Delay Time	$t_{d(OFF)}$		-	46.1	-	ns
Fall Time	t_f		-	16.5	-	ns
Total Gate Charge	Q_g	$I_D=7A, V_{DS}=400V$ $V_{GS}=0/15V$	-	15.3	-	nC
Gate to Source Charge	Q_{gs}		-	5.5	-	nC
Gate to Drain("Miller") Charge	Q_{gd}		-	2.6	-	nC
Source-Drain Diode Characteristics						
Continuous Source Current(Body Diode)	I_S		-	-	19.5	A
Diode Forward Voltage	V_{SD}	$I_{SD}=7A, V_{GS}=0V$	-	3.3	-	V
Reverse Recovery Time	t_{rr}	$I_{SD}=7A, T_J=25^\circ\text{C}$ $di/dt=2000A/\mu s$	-	68	-	ns
Reverse Recovery Charge	Q_{rr}		-	26	-	nC

■ TYPICAL CHARACTERISTICS(Cont.)

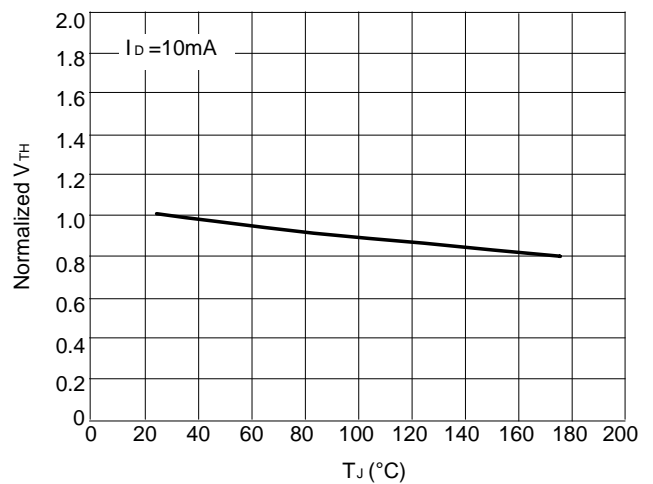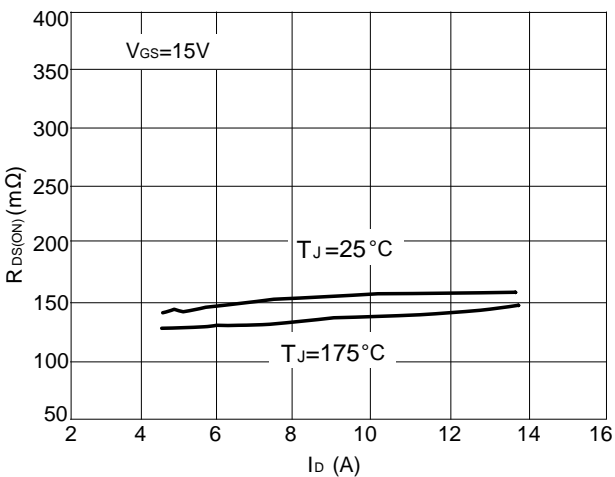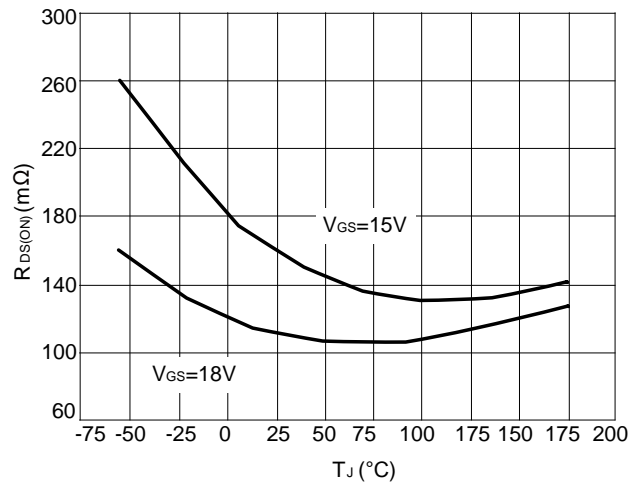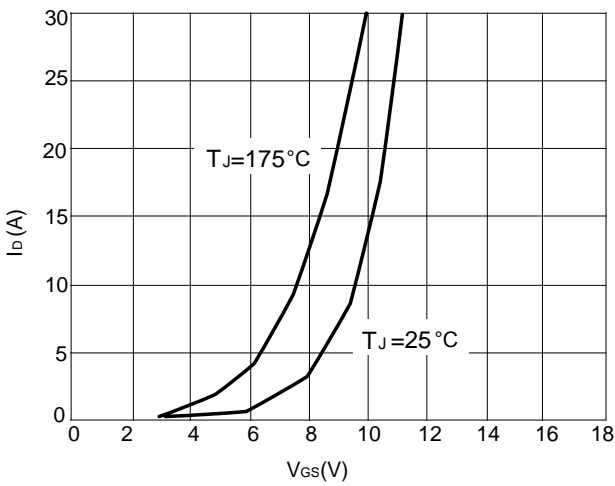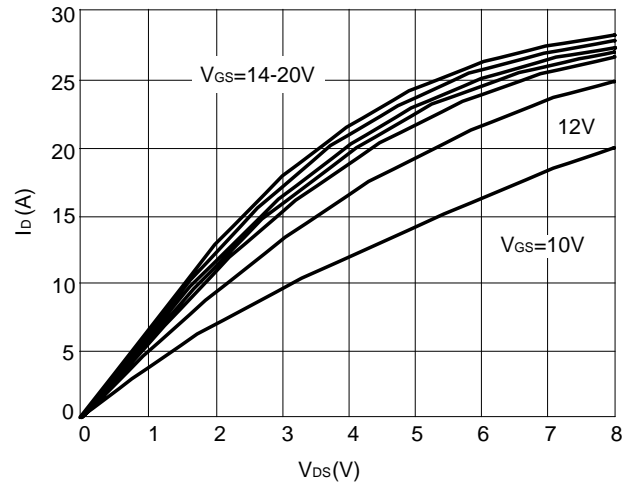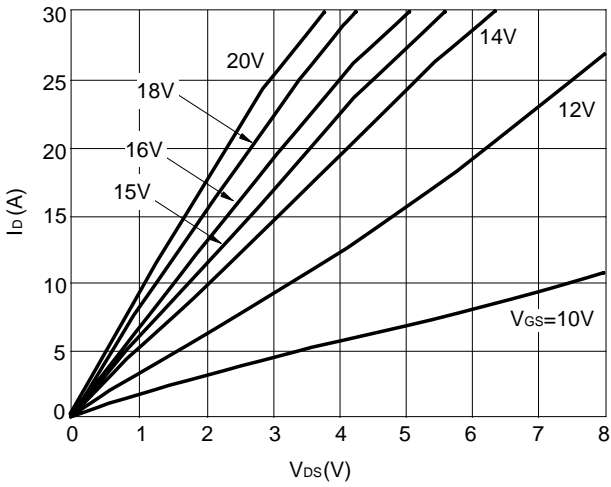

■ TYPICAL CHARACTERISTICS(Cont.)

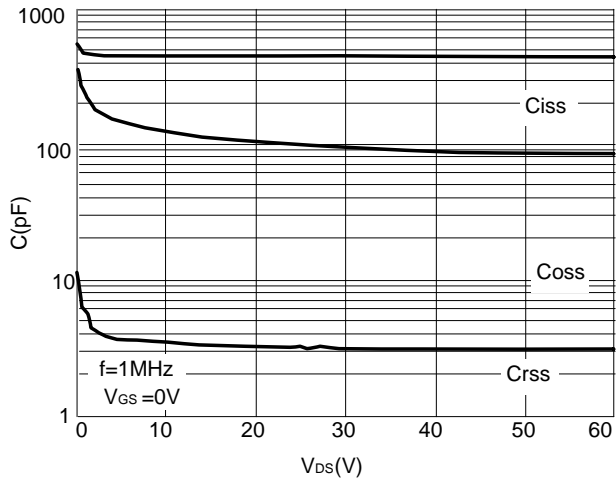


Figure 7: Capacitance vs. Drain-Source Voltage

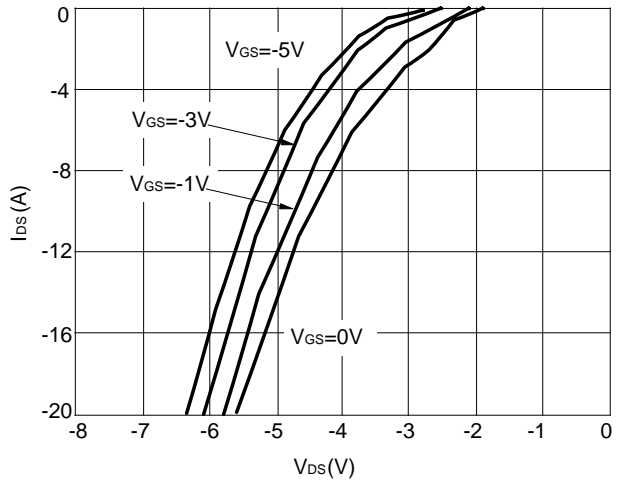


Figure 8: Body Diode Characteristics

■ TO-252 PACKAGE OUTLINE DIMENSIONS

