


■ PRODUCT CHARACTERISTICS

V _{DSS}	-30V
R _{DS(ON)} Typ(@V _{GS} =-10V)	7mΩ
R _{DS(ON)} Typ(@V _{GS} =-4.5V)	9.5mΩ
I _D	-30A

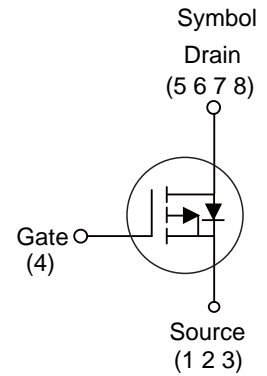


■ APPLICATIONS

- * Electronic lamp ballasts based on half bridge
- * Load Switching, Quick/Wireless Charge.
- * Motor Driving

■ FEATURE

- * Low Gate Charge
- * Pb-Free Lead Plating

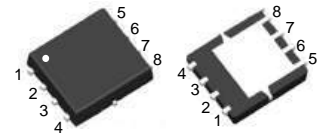

PDFN3X3

■ ORDER INFORMATION

Order Codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT3390J	PDFN3X3	5000 pieces/Reel

■ ABSOLUTE MAXIMUM RATINGS(T_A=25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V _{DSS}	-30	V
Gate-Source Voltage	V _{GSS}	±20	V
Drain Current Continuous(@V _{GS} =-10V, T _A =25°C)	I _D	-30	A
Drain Current Pulsed	I _{DM}	-120	A
Avalanche Energy	E _{AS}	320	mJ
Power Dissipation	P _D	40	W
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55~ +150	°C

■ THERMAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Junction to Case	R _{thJC}	3.13	°C/W

■ ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain to Source Breakdown Voltage	V_{DSS}	$V_{GS}=0V, I_D=-250\mu A$	-30	-	-	V
Drain to Source Leakage Current	I_{DSS}	$V_{DS}=-30V, V_{GS}=0V$	-	-	-1	μA
Gate to Source Forward Leakage	$I_{GSS(F)}$	$V_{GS}=+20V, V_{DS}=0V$	-	-	100	nA
Gate to Source Reverse Leakage	$I_{GSS(R)}$	$V_{GS}=-20V, V_{DS}=0V$	-	-	-100	nA
On characteristics						
Drain to Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=-10V, I_D=-15A$	-	7	9	m Ω
		$V_{GS}=-4.5V, I_D=-15A$	-	9.5	12	m Ω
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1	-1.5	-2.5	V
Dynamic characteristics						
Gate capacitance	R_g	$V_{GS}=0V, V_{DS}=0V, f=1.0\text{MHz}$	-	6.1	-	Ω
Forward Transconductance	g_{fs}	$V_{DS}=-10V, I_D=-3A$	-	12	-	S
Input Capacitance	C_{iss}	$V_{DS}=-20V, V_{GS}=0V$ $f=1.0\text{MHz}$	-	3200	-	pF
Output Capacitance	C_{oss}		-	385	-	pF
Reverse Transfer Capacitance	C_{rss}		-	340	-	pF
Resistive Switching Characteristics						
Turn-on Delay Time	$t_{d(ON)}$	$V_{GS}=-10V, V_{DS}=-15V,$ $I_D=-15A, R_G=3\Omega$	-	15	-	ns
Rise Time	t_r		-	11	-	ns
Turn-off Delay Time	$t_{d(OFF)}$		-	44	-	ns
Fall Time	t_f		-	21	-	ns
Total Gate Charge	Q_g	$I_D=-15A, V_{DS}=-15V$ $V_{GS}=-10V$	-	81.3	-	nC
Gate to Source Charge	Q_{gs}		-	13.8	-	nC
Gate to Drain("Miller") Charge	Q_{gd}		-	8.3	-	nC
Source-Drain Diode Characteristics						
Continuous Source Current(Body Diode)	I_S		-	-	-30	A
Maximum Pulsed Current(Body Diode)	I_{SM}		-	-	-120	A
Diode Forward Voltage	V_{SD}	$I_{SD}=-1A, V_{GS}=0V$	-	-0.72	-1.2	V
Reverse Recovery Time	t_{rr}	$I_{SD}=-20A, T_J=25^{\circ}\text{C}$ $di/dt=100A/\mu s$	-	24	-	ns
Reverse Recovery Charge	Q_{rr}		-	16	-	nC

■ TYPICAL CHARACTERISTICS

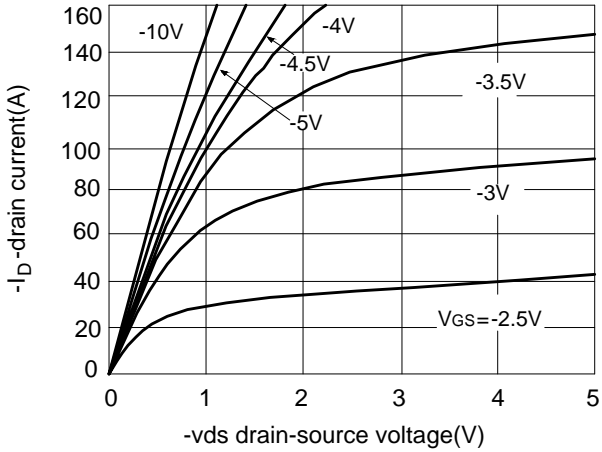


Fig.1 output characteristics

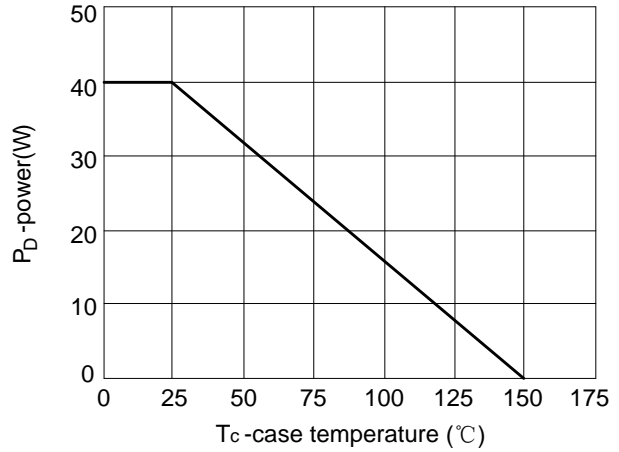


Fig.2 power dissipation

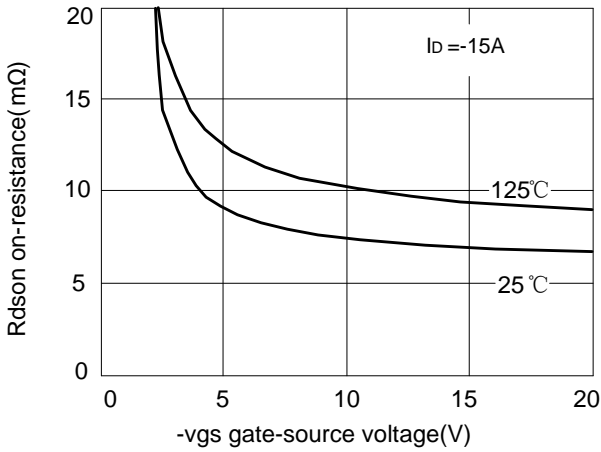


Fig.3 rdson vs vgs

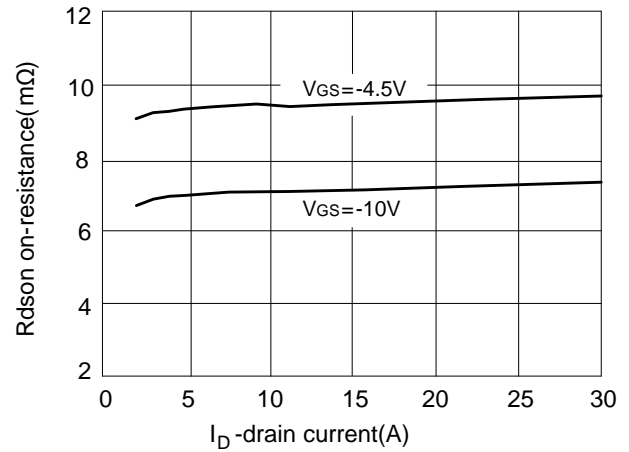


Fig.4 drain-source on-resistance

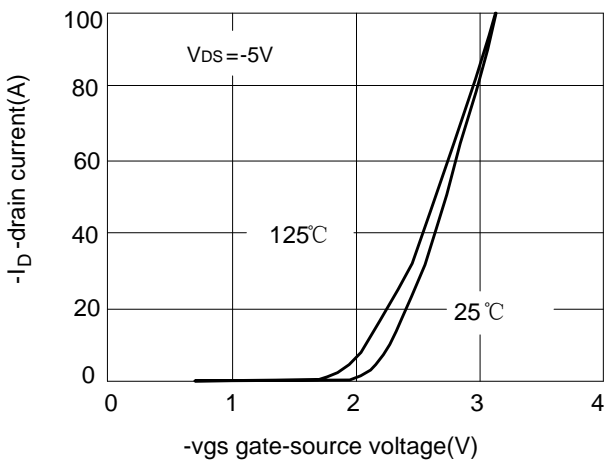


Fig.5 transfer characteristics








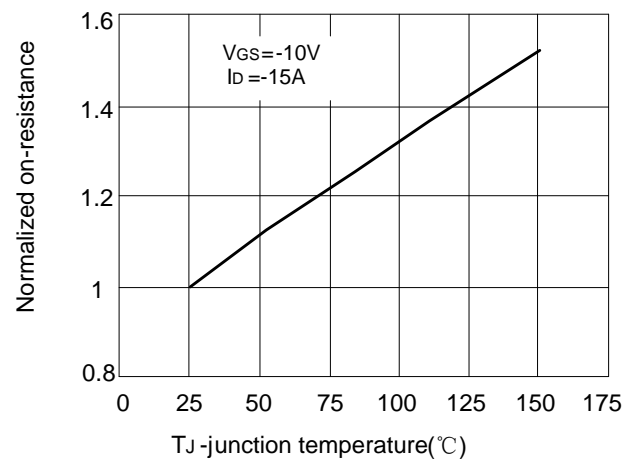


Fig.6 drain-source on-resistance


■ TYPICAL CHARACTERISTICS(Cont.)

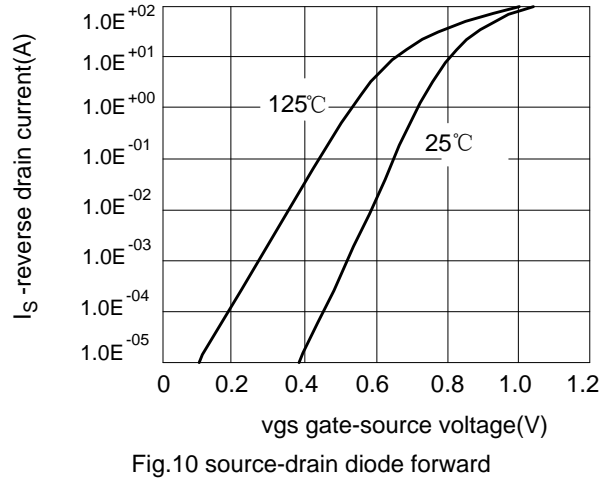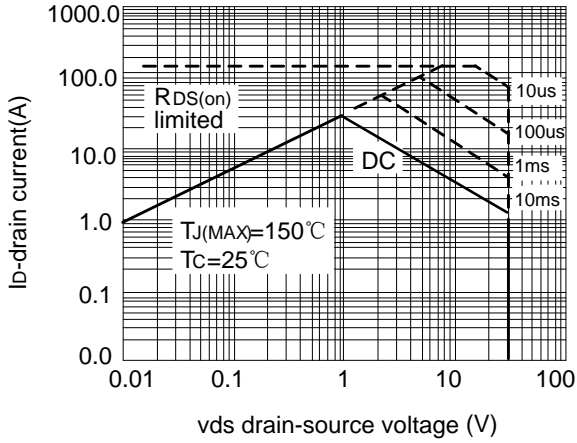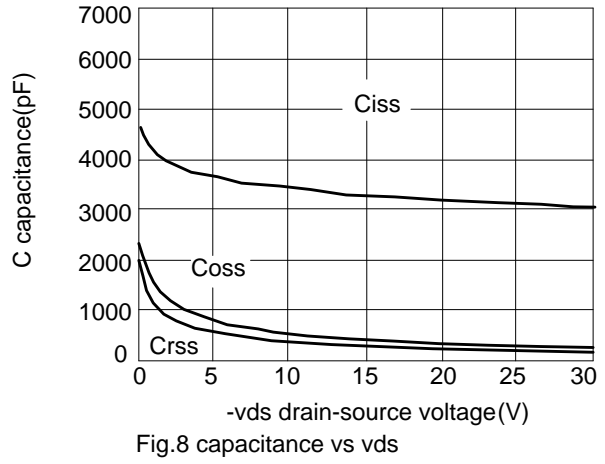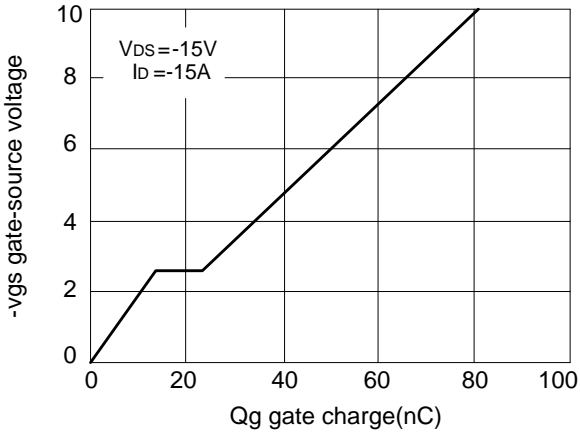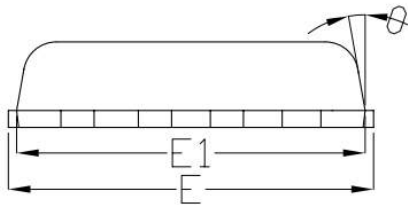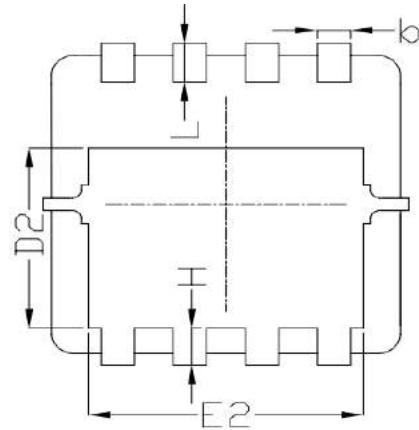

■ PDFN3X3 PACKAGE OUTLINE DIMENSIONS

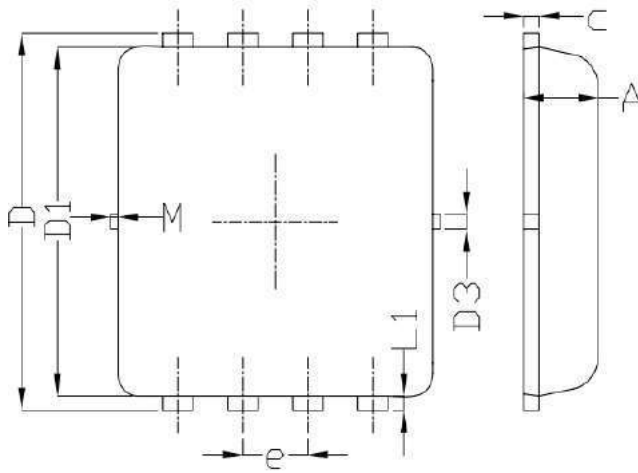

Land Pattern
(Only for Reference)

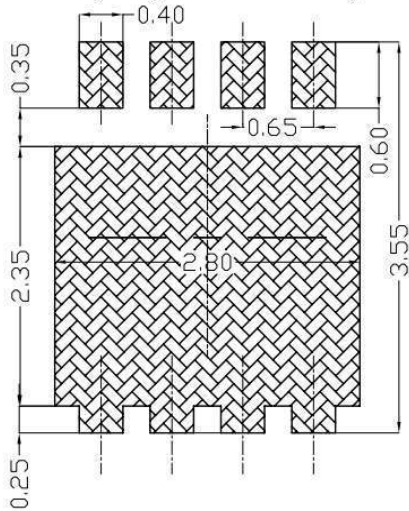

SYMBOL	DIMENSIONAL REOMTS		
	MIN	NOM	MAX
A	0.70	0.75	0.80
b	0.25	0.30	0.35
c	0.10	0.15	0.25
D	3.25	3.35	3.45
D1	3.00	3.10	3.20
D2	1.78	1.88	1.98
D3	---	0.13	---
E	3.20	3.30	3.40
E1	3.00	3.15	3.20
E2	2.39	2.49	2.59
e	0.65BSC		
H	0.30	0.39	0.50
L	0.30	0.40	0.50
L1	---	0.13	---
θ	---	10°	12°
M	*	*	0.15
* Not specified			