


PRODUCT CHARACTERISTICS

V_{DSS}	500V
$R_{DS(ON)}$ Typ(@ $V_{GS}=10V$)	0.09 Ω
Qg@typ	105nC
I_D	50A



APPLICATIONS

- * High efficiency switch mode power supplies
- * Electronic lamp ballasts based on half bridge
- * LED power supplies

FEATURE

- * High Switching Speed
- * Improved dv/dt capability

ORDER INFORMATION

Order Codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT50N50N	TO-247	30 pieces/Tube



ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}C$, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DSS}	500	V
Gate-Source Voltage	V_{GSS}	± 30	V
Drain Current Continuous(@ $V_{GS}=10V, T_A=25^{\circ}C$)	I_D	50	A
Drain Current Pulsed	I_{DM}	200	A
Avalanche Energy *	E_{AS}	2100	mJ
Power Dissipation	P_D	625	W
Junction Temperature	T_J	+150	$^{\circ}C$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}C$

THERMAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Junction to Ambient	R_{thJA}	40	$^{\circ}C/W$
Junction to Case	R_{thJC}	0.2	$^{\circ}C/W$

Note: * EAS condition: $T_J=25^{\circ}C, V_{DD}=70V, V_G=10V, L=1mH, R_g=25\Omega$

■ ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain to Source Breakdown Voltage	V _{DSS}	V _{GS} =0V, I _D =250μA	500	-	-	V
Drain to Source Leakage Current	I _{DSS}	V _{DS} =500V, V _{GS} =0V	-	-	1	μA
Gate to Source Forward Leakage	I _{GSS(F)}	V _{DS} =0V, V _{GS} =+30V	-	-	100	nA
Gate to Source Reverse Leakage	I _{GSS(R)}	V _{DS} =0V, V _{GS} =-30V	-	-	-100	nA
On characteristics						
Drain to Source On-Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =25A	-	0.09	0.105	Ω
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2	-	4	V
Dynamic characteristics						
Gate Resistance	R _g	V _{GS} =0V, V _{DS} =0V ,f=1.0MHz	-	1.1	-	Ω
Forward Transconductance	g _{fs}	V _{DS} =10V, I _D =3A	-	12	-	S
Input Capacitance	C _{iss}	V _{DS} =25V, V _{GS} =0V f=1.0MHz	-	8400	-	pF
Output Capacitance	C _{oss}		-	722	-	pF
Reverse Transfer Capacitance	C _{rss}		-	28	-	pF
Resistive Switching Characteristics						
Turn-on Delay Time	t _{d(ON)}	I _D =50 A, V _{DS} =250V R _G =25Ω ,V _{GS} =10V	-	105	-	ns
Rise Time	t _r		-	360	-	ns
Turn-off Delay Time	t _{d(OFF)}		-	225	-	ns
Fall Time	t _f		-	230	-	ns
Total Gate Charge	Q _g	I _D =50 A, V _{DS} =250V V _{GS} =10V	-	105	-	nC
Gate to Source Charge	Q _{gs}		-	33	-	nC
Gate to Drain("Miller") Charge	Q _{gd}		-	45	-	nC
Source-Drain Diode Characteristics						
Continuous Source Current(Body Diode)	I _s		-	-	50	A
Maximum Pulsed Current(Body Diode)	I _{SM}		-	-	200	A
Diode Forward Voltage	V _{SD}	I _{SD} =1A, V _{GS} =0V	-	0.66	1.2	V
Reverse Recovery Time	t _{rr}	I _{SD} =50 A, T _J =25 °C	-	580	-	ns
Reverse Recovery Charge	Q _{rr}	di /dt=100A/μs	-	10	-	uC

■ TYPICAL CHARACTERISTICS

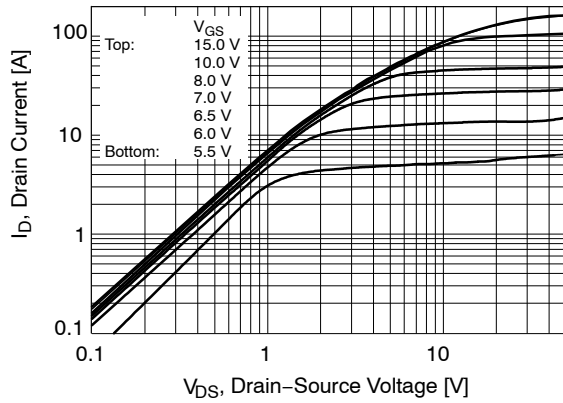


Figure1:Output characteristics

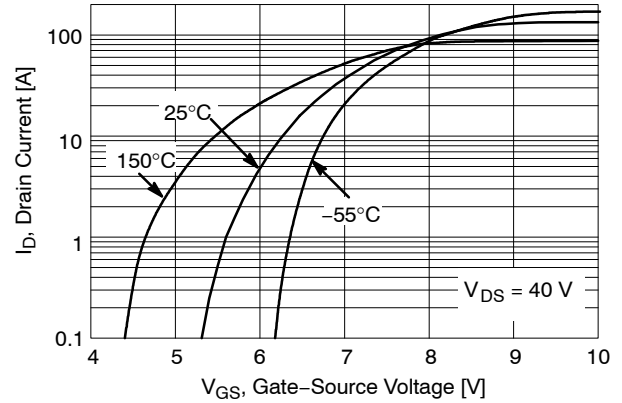


Figure2:Transfer characteristics

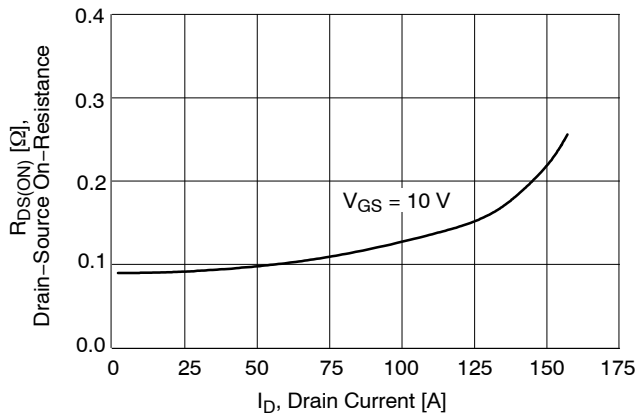


Figure3:On-resistance variation vs drain current and gate voltage

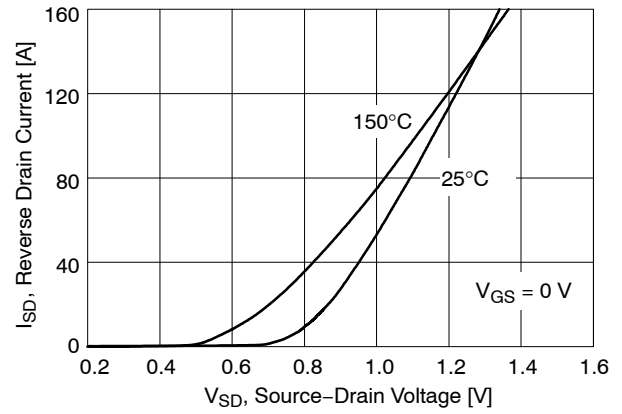


Figure4:Body diode forward voltage variation vs.source current and temperature

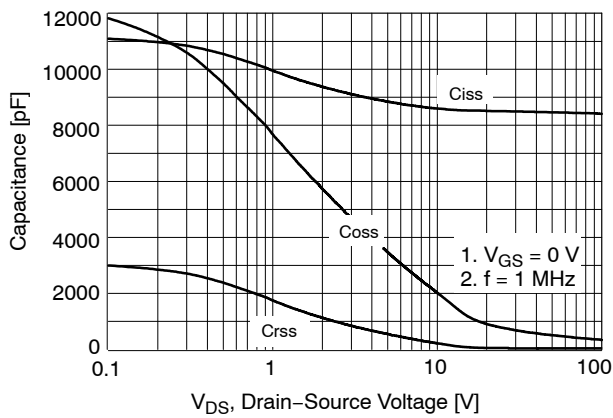


Figure5:capacitance characteristics

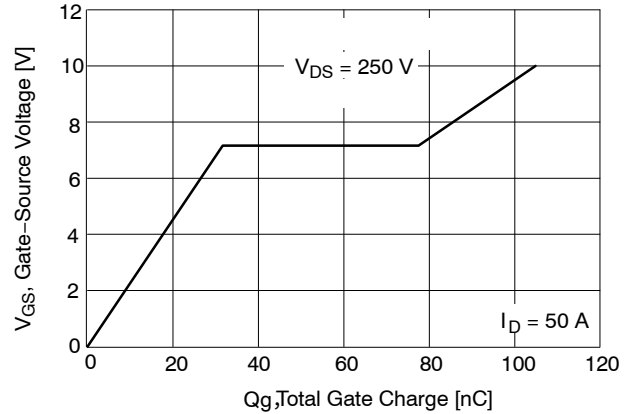


Figure6:Gate charge characteristics

■ TYPICAL CHARACTERISTICS

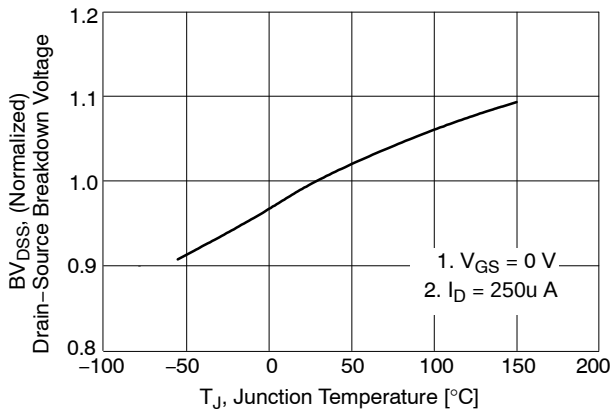


Figure7:Breakdown voltage variation
vs Junction temperature

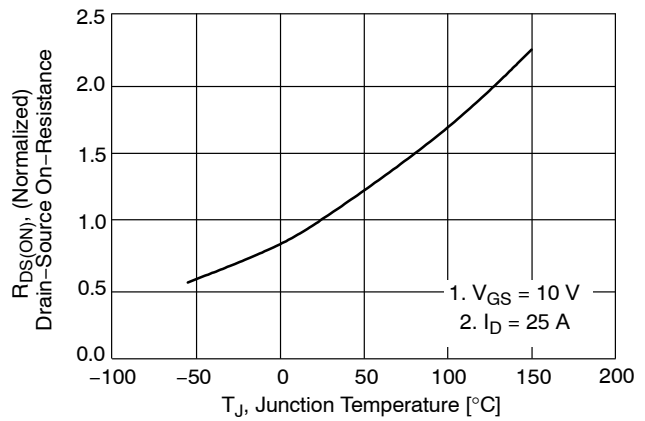


Figure8:On-resistance variation
vs Junction temperature

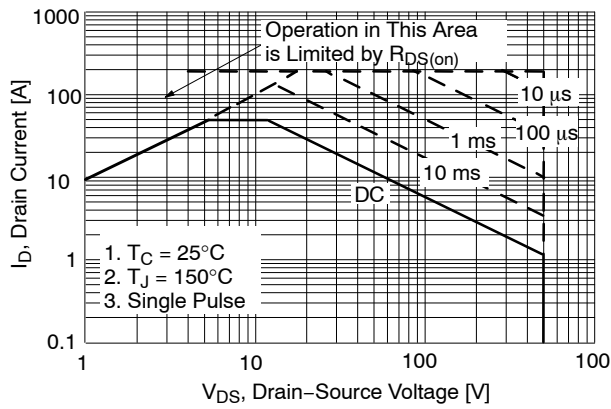


Figure9:Maximum safe operating area

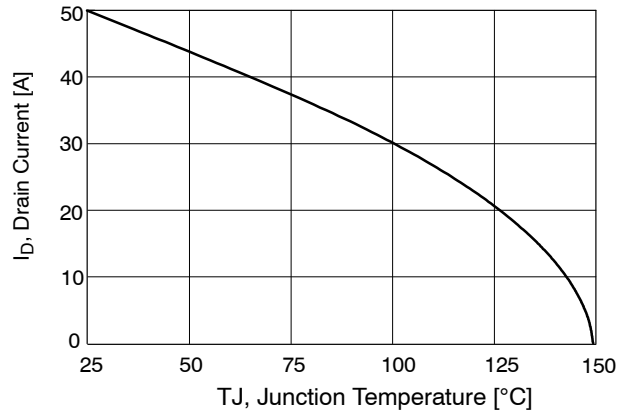


Figure10:Maximum drain current
vs Junction temperature

■ TO-247 PACKAGE OUTLINE DIMENSIONS

