


■ PRODUCT CHARACTERISTICS

V_{DSS}	500V
$R_{DS(ON)}$ Typ(@ $V_{GS}=10V$)	1.55Ω
Qg@typ	13nC
I_D	5A




■ APPLICATIONS

- * High efficiency switch mode power supplies
- * Electronic lamp ballasts based on half bridge
- * LED power supplies

■ FEATURE

- * High Switching Speed
- * Improved dv/dt capability



TO-251

■ ORDER INFORMATION

Order Codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT5N50C	TO-251	70 pieces/Tube

■ ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}C$, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DSS}	500	V
Gate-Source Voltage	V_{GSS}	±30	V
Drain Current Continuous(@ $V_{GS}=10V, T_A=25^{\circ}C$)	I_D	5	A
Drain Current Pulsed	I_{DM}	20	A
Avalanche Energy *	E_{AS}	320	mJ
Peak Diode Recovery dv/dt	dv/dt	5.0	V/ns
Power Dissipation	P_D	50	W
Junction Temperature	T_J	+150	°C
Storage Temperature	T_{STG}	-55~ +150	°C

■ THERMAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Junction to Ambient	R_{thJA}	100	°C/W
Junction to Case	R_{thJC}	2.5	°C/W

Note: * EAS condition: $T_J=25^{\circ}C, V_{DS}=70V, V_G=10V, L=10mH, R_g=25\Omega$

■ ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain to Source Breakdown Voltage	V_{DSS}	$V_{GS}=0V, I_D=250\mu A$	500	-	-	V
Drain to Source Leakage Current	I_{DSS}	$V_{DS}=500V, V_{GS}=0V$	-	-	1	μA
Gate to Source Forward Leakage	$I_{GSS(F)}$	$V_{DS}=0V, V_{GS}=+30V$	-	-	100	nA
Gate to Source Reverse Leakage	$I_{GSS(R)}$	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
On characteristics						
Drain to Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=2.5A$	-	1.55	1.85	Ω
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2	-	4	V
Dynamic characteristics						
Gate capacitance	R_g	$V_{GS}=0V, V_{DS}=0V, f=1.0\text{MHz}$	-	3.4	-	Ω
Forward Transconductance	g_{fs}	$V_{DS}=10V, I_D=3A$	-	4	-	S
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V$ $f=1.0\text{MHz}$	-	550	-	pF
Output Capacitance	C_{oss}		-	45	-	pF
Reverse Transfer Capacitance	C_{rss}		-	1	-	pF
Resistive Switching Characteristics						
Turn-on Delay Time	$t_{d(ON)}$	$I_D=5A, V_{DS}=250V$ $R_G=25\Omega, V_{GS}=10V$	-	13	-	ns
Rise Time	t_r		-	48	-	ns
Turn-off Delay Time	$t_{d(OFF)}$		-	52	-	ns
Fall Time	t_f		-	50	-	ns
Total Gate Charge	Q_g	$I_D=5A, V_{DS}=250V$ $V_{GS}=10V$	-	13	-	nC
Gate to Source Charge	Q_{gs}		-	3.5	-	nC
Gate to Drain("Miller") Charge	Q_{gd}		-	10.1	-	nC
Source-Drain Diode Characteristics						
Continuous Source Current(Body Diode)	I_S		-	-	5	A
Maximum Pulsed Current(Body Diode)	I_{SM}		-	-	20	A
Diode Forward Voltage	V_{SD}	$I_{SD}=1A, V_{GS}=0V$	-	0.74	1.2	V
Reverse Recovery Time	t_{rr}	$I_{SD}=5A, T_J=25^{\circ}\text{C}$ $di/dt=100A/\mu s$	-	201	-	ns
Reverse Recovery Charge	Q_{rr}		-	262	-	nC

■ TYPICAL CHARACTERISTICS

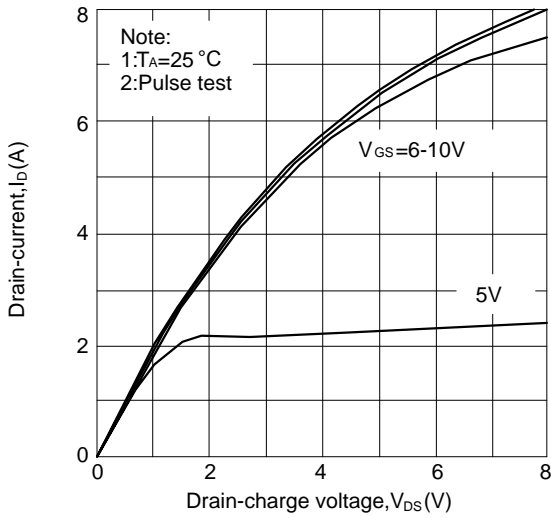


Figure 1: Drain current vs. drain-source voltage

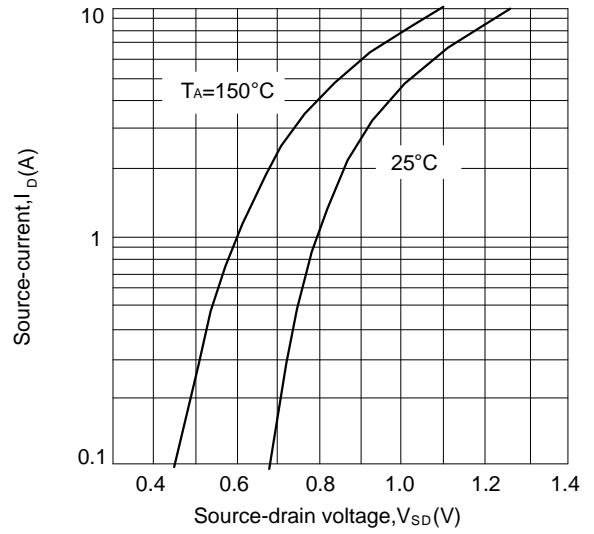


Figure 2: Source current vs. source-drain

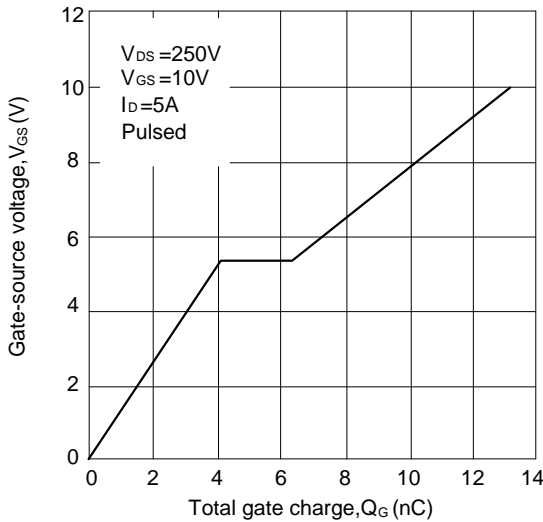


Figure 3: Gate charge characteristics

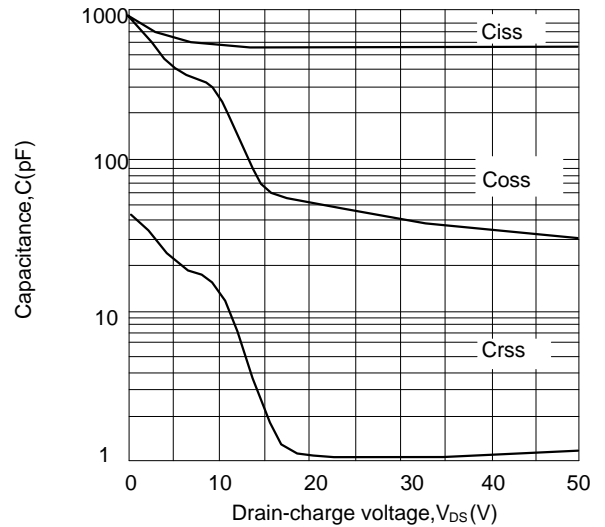


Figure 4: Capacitance characteristics

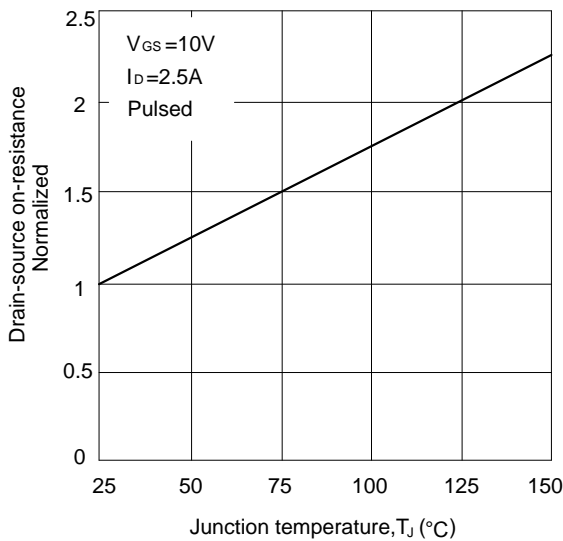


Figure 5: Drain-source on-resistance vs. junction temperature

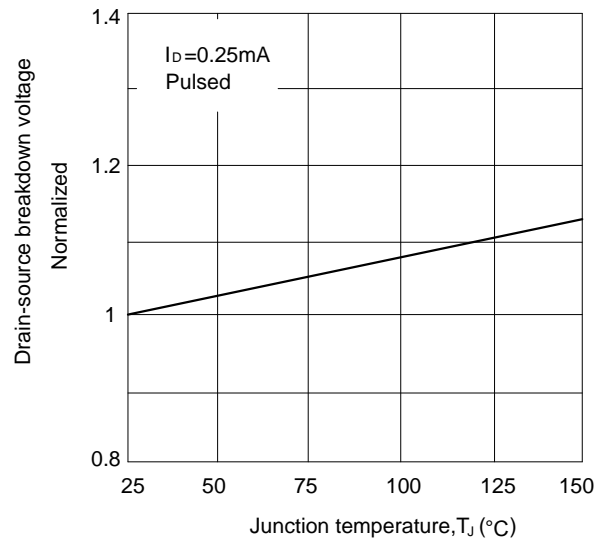


Figure 6: Breakdown voltage vs. junction temperature

■ TYPICAL CHARACTERISTICS(Cont.)

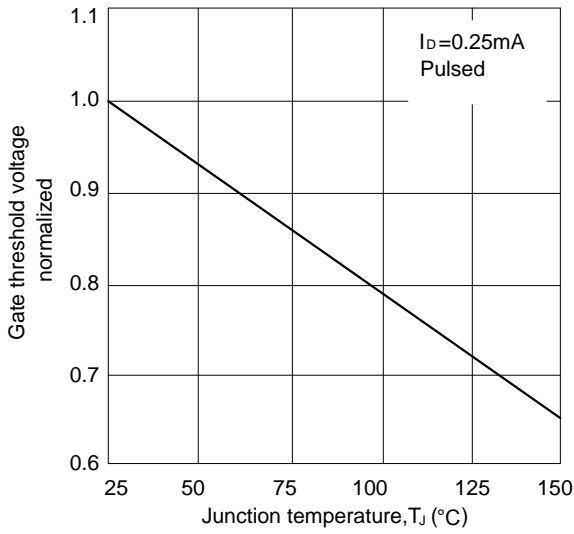


Figure 7: Gate threshold voltage vs junction temperature

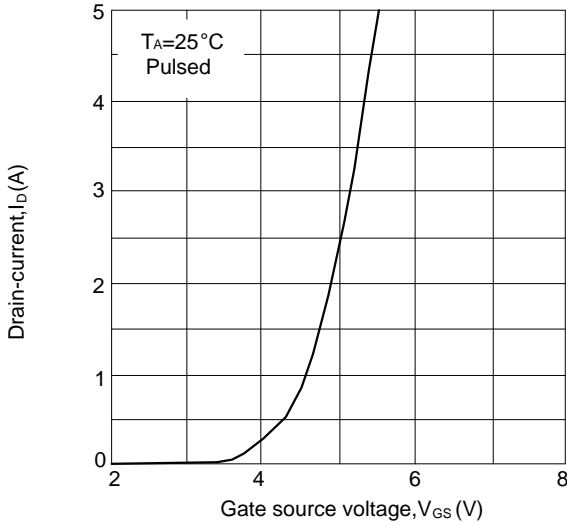


Figure 9: Drain-current vs. gate-source

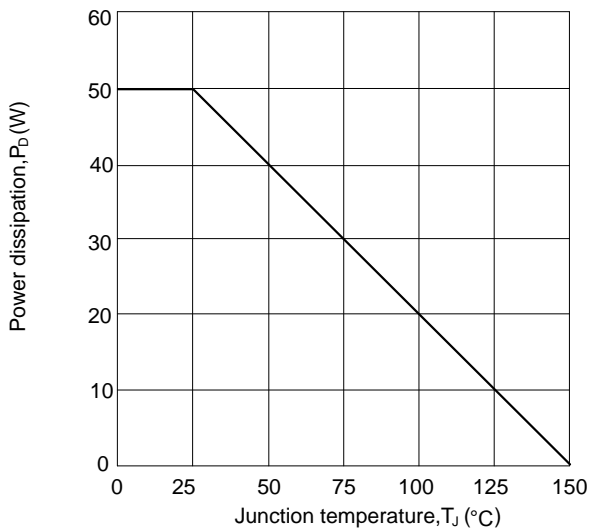


Figure 11: Power dissipation vs.junction temperature

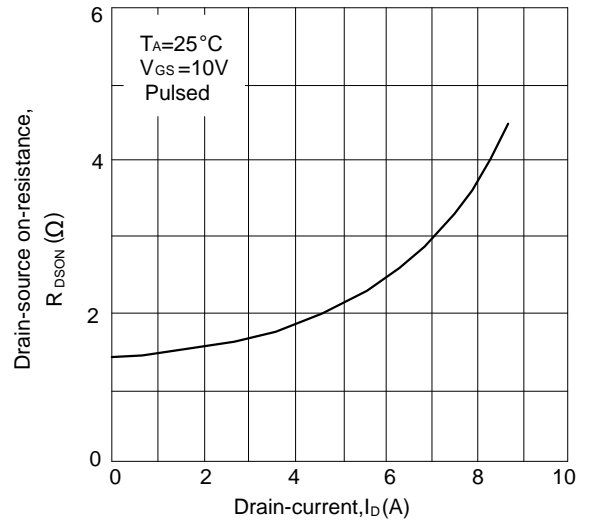


Figure 8: Drain-source on-resistance vs. drain-current

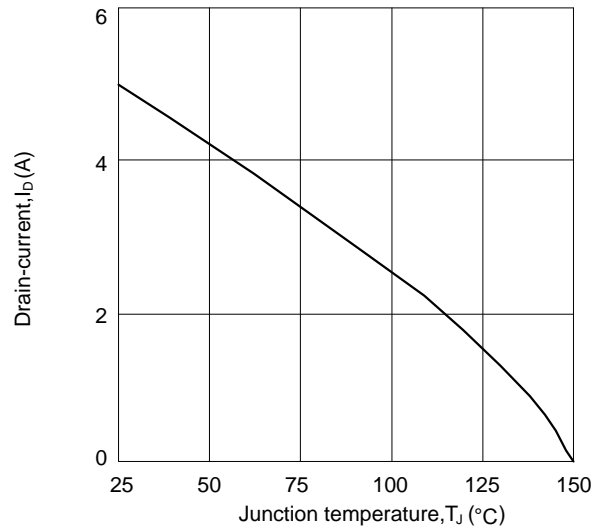


Figure 10: Drain current vs.junction temperature

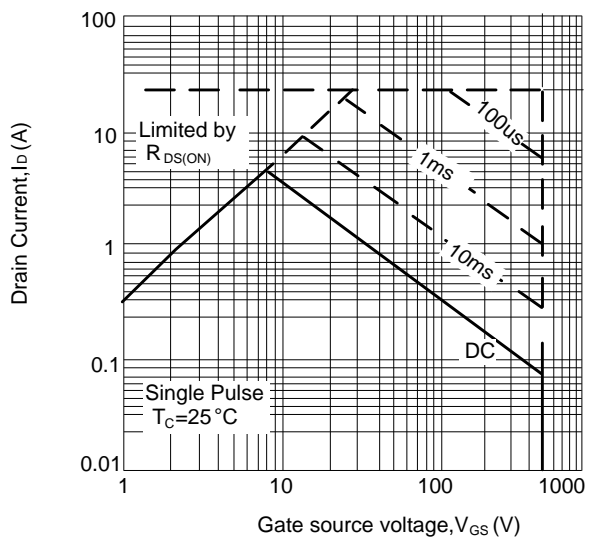


Figure 12: Safe operating area

