

PRODUCT CHARACTERISTICS

V_{DS}	-60V
$R_{DS(ON)}$ Typ(@ $V_{GS}=-10V$)	26m Ω
$R_{DS(ON)}$ Typ(@ $V_{GS}=-4.5V$)	31m Ω
I_D	-11A

APPLICATIONS

- * Electronic lamp ballasts based on half bridge
- * Load Switching, Quick/Wireless Charge.
- * Motor Driving

FEATURE

- * Low Gate Charge
- * Pb-Free Lead Plating



ORDER INFORMATION

Order Codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT6727S	SOP8	4000 pieces/Reel

ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}C$, unless otherwise specified)



Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current Continuous(@ $V_{GS}=-10V$, $T_A=25^{\circ}C$)	I_D	-11	A
Drain Current Pulsed	I_{DM}	-44	A
Avalanche Energy	E_{AS}	196	mJ
Power Dissipation	P_D	5	W
Junction Temperature	T_J	+150	$^{\circ}C$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}C$

THERMAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Junction to Ambient	R_{thJA}	25	$^{\circ}C/W$

Note: * EAS condition: $T_J=25^{\circ}C$, $V_{DD}=30V$, $V_G=10V$, $L=0.5mH$, $R_g=25\Omega$

Symbol



■ ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain to Source Breakdown Voltage	V _{DSS}	V _{GS} =0V,I _D =-250μA	-60	-	-	V
Drain to Source Leakage Current	I _{DSS}	V _{DS} =-60V,V _{GS} =0V	-	-	-1	μA
Gate to Source Forward Leakage	I _{GSS(F)}	V _{GS} =+20V,V _{DS} =0V	-	-	100	nA
Gate to Source Reverse Leakage	I _{GSS(R)}	V _{GS} =-20V ,V _{DS} =0V	-	-	-100	nA
On characteristics						
Drain to Source On-Resistance	R _{DS(ON)}	V _{GS} =-10V,I _D =-1 A	-	26	30	mΩ
		V _{GS} =-4.5V,I _D =-1 A	-	31	35	mΩ
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} ,I _D =-250μA	-1	-1.6	-2.5	V
Dynamic characteristics						
Gate Resistance	R _g	V _{GS} =0V,V _{DS} =0V ,f=1.0MHz	-	5.1	-	Ω
Forward Transconductance	g _{fs}	V _{DS} =-5V,I _D =-5A	-	17	-	S
Input Capacitance	C _{iss}	V _{DS} =-20V,V _{GS} =0V f=1.0MHz	-	3600	-	pF
Output Capacitance	C _{oss}		-	164	-	pF
Reverse Transfer Capacitance	C _{rss}		-	150	-	pF
Resistive Switching Characteristics						
Turn-on Delay Time	t _{d(ON)}	V _{GS} =-10V,V _{DS} =-30V, I _D =-8 A ,R _G =3Ω	-	14.2	-	ns
Rise Time	t _r		-	6.6	-	ns
Turn-off Delay Time	t _{d(OFF)}		-	118	-	ns
Fall Time	t _f		-	70	-	ns
Total Gate Charge	Q _g	I _D =-8A, V _{DS} =-30V V _{GS} =-10V	-	62.7	-	nC
Gate to Source Charge	Q _{gs}		-	8.2	-	nC
Gate to Drain("Miller") Charge	Q _{gd}		-	10.2	-	nC
Source-Drain Diode Characteristics						
Continuous Source Current(Body Diode)	I _s		-	-	-11	A
Maximum Pulsed Current(Body Diode)	I _{SM}		-	-	-44	A
Diode Forward Voltage	V _{SD}	I _{SD} =-1A, V _{GS} =0V	-	-0.73	-1.2	V
Reverse Recovery Time	t _{rr}	I _{SD} =-8A, T _J =25℃ dI/dt=100A/μs	-	30	-	ns
Reverse Recovery Charge	Q _{rr}		-	31	-	nC

■ TYPICAL CHARACTERISTICS

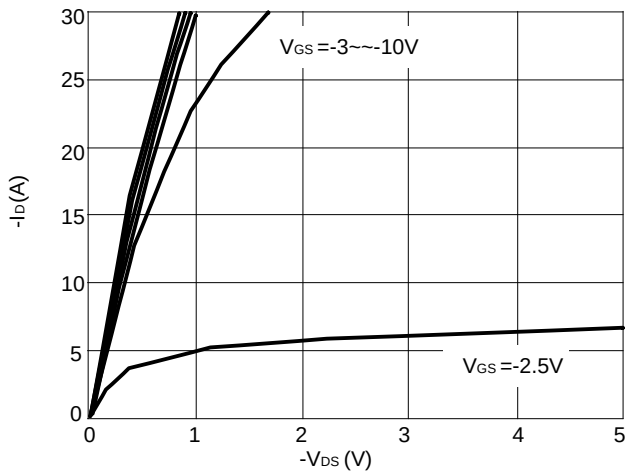


Figure 1: Output Characteristics

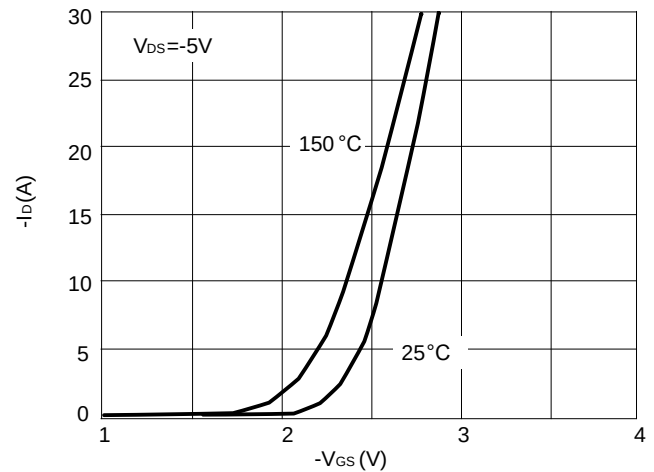


Figure 2: Transfer Characteristics

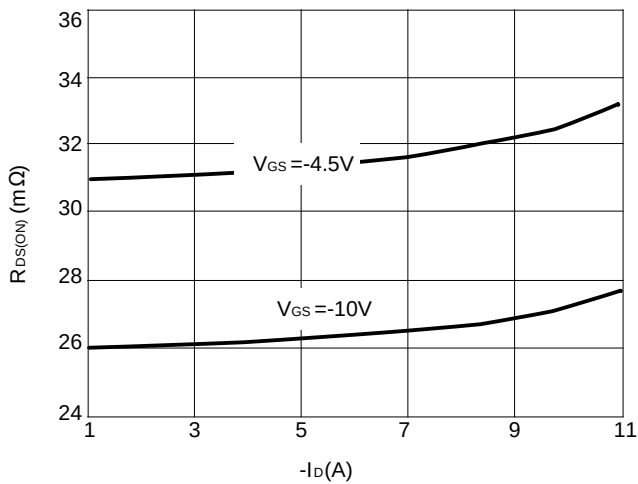


Figure 3: R_{DS(on)} vs. Drain Current and Gate Voltage

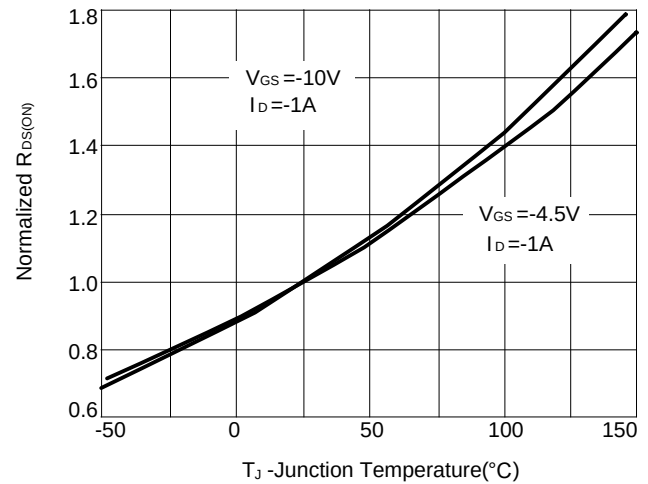


Figure 4: R_{DS(on)} vs. Temperature

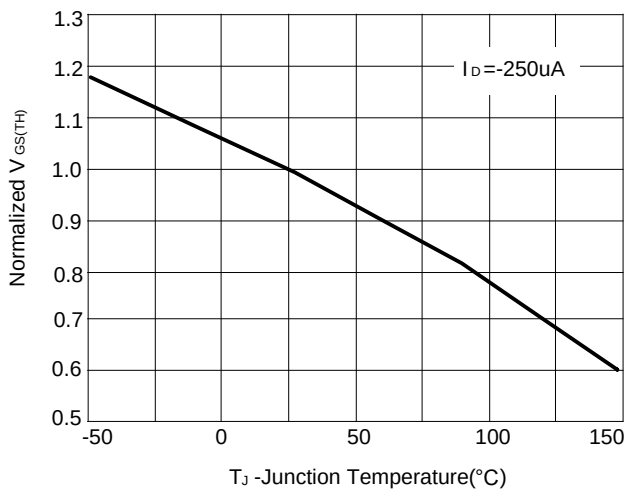


Figure 5: V_{GS(th)} vs. Temperature

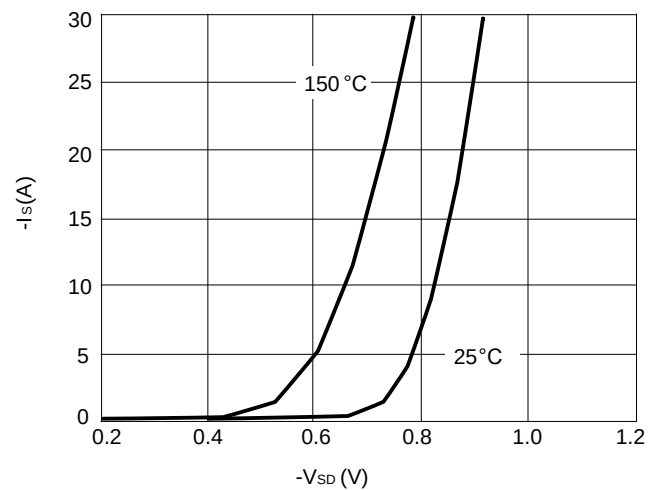


Figure 6: Body-Diode Forward Characteristics

■ TYPICAL CHARACTERISTICS(Cont.)

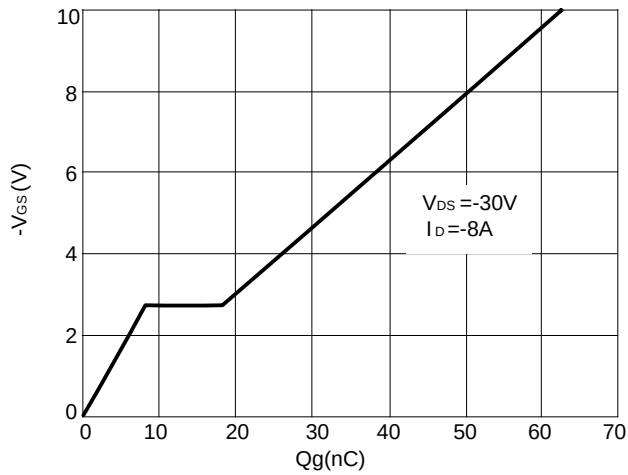


Figure 7: Gate Charge Characteristics

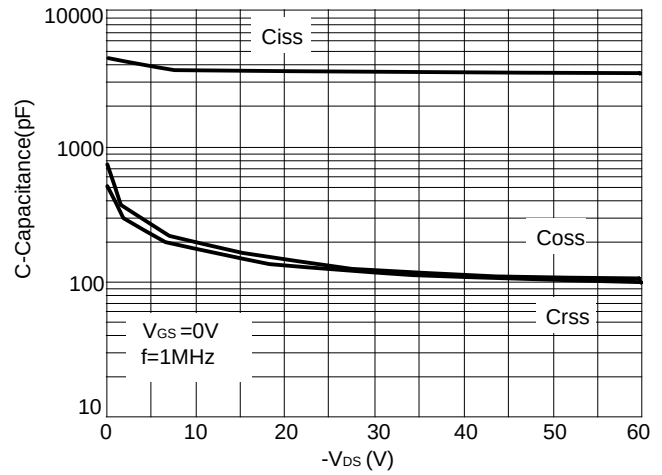


Figure 8: Capacitance Characteristics

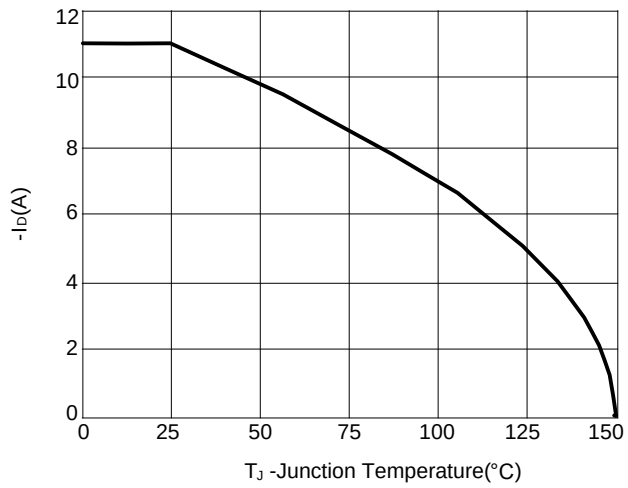


Figure 9: Drain Current Derating

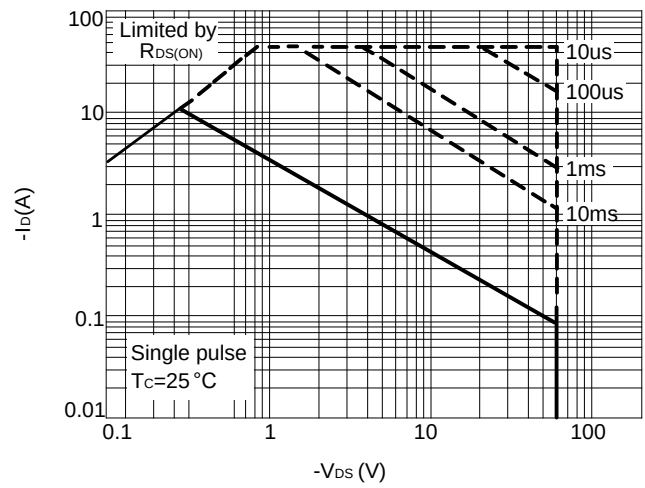


Figure 10: Safe Operating Area

■ SOP8 PACKAGE OUTLINE DIMENSIONS

