


■ PRODUCT CHARACTERISTICS

VR(@IC=0.5mA)	600V
VF(Typ@IF=20A)	1.3V
IR(@VR=600V)	10uA
ID	40A
TRR	35nS



■ MECHANICAL CHARACTERISTICS

- \* Case: epoxy,molded
- \* Finish:all external surfaces corrosion resistant and terminal
- \* Leads are readily solderable
- \* Leads temperature for soldering purposes:  
260°C Max for 10 seconds

■ FEATURES

- \* Guard ring for stress protection
- \* Low forward voltage
- \* Low power loss/high efficiency
- \* High surge capacity
- \* Low stored charge majority carrier conduction
- \* Pb free package are available



TO-247S

■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-free	Halogen		
N/A	MUR4060W	TO-247S	30pieces/Tube

■ MAXIMUM RATINGS (Each diode leg)

Parameter	Symbol	Value	Unit
Peak repetitive reverse voltage	$V_{RRM}$	600	V
Average rectified output current	Total	40	A
	Per leg	20	A
Non-repetitive peak forward surge current 8.3ms single half sine-wave superimposed on reate load	$I_{FSM}$	400	A
Operating and storage temperature range	$T_J, T_{STG}$	-55 to + 175	°C

■ ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Peak repetitive reverse voltage	$B_V$	$I_C=0.5mA, T_J=25^\circ C$	600	-	-	V
Forward voltage drop	$V_F$	$I_F=15A, T_J=25^\circ C$	-	1.3	1.5	V
Leakage current	$I_R$	$V_R=600V, T_J=25^\circ C$	-	-	0.01	mA
		$V_R=600V, T_J=125^\circ C$	-	-	10	mA
Fast recovery diode reverse recovery time	$T_{RR}$	Recovery time $I_F=1A, dI_F/dt=200A/\mu s$	-	-	35	nS

■ TYPICAL CHARACTERISTICS

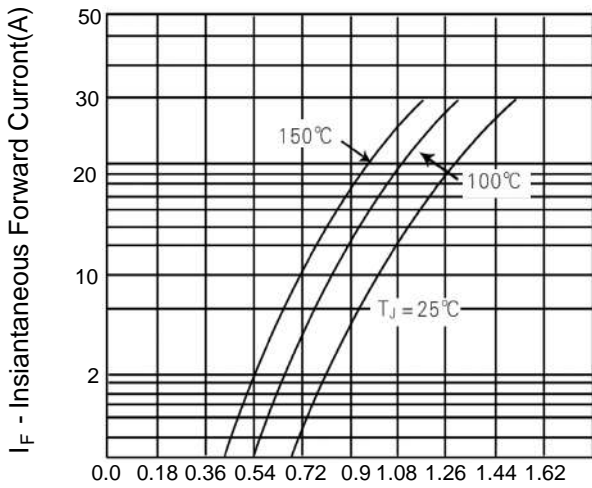


Figure 1. Typical Forward Voltage Per Diode



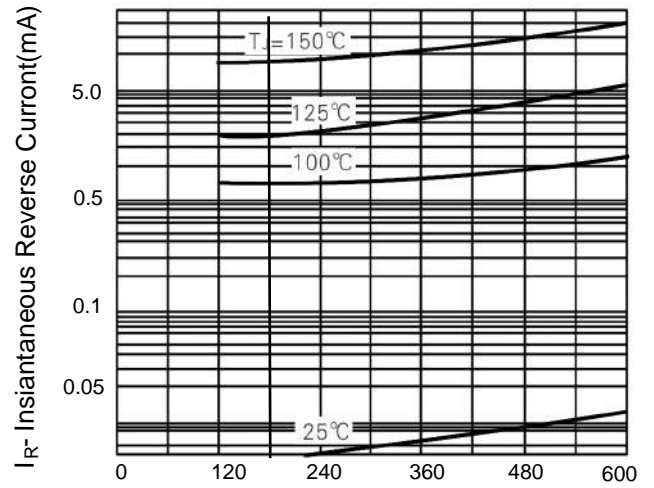


Figure 2. Typical Reverse Current Per Diode

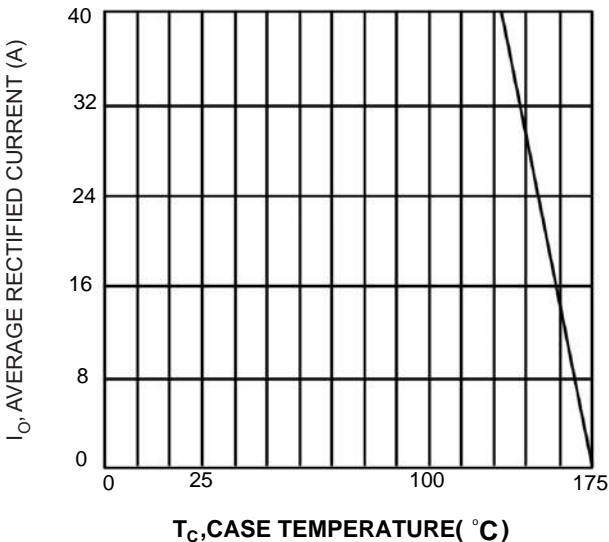

T<sub>C</sub>, CASE TEMPERATURE( °C)  
Fig.3 Forward Current Derating Curve

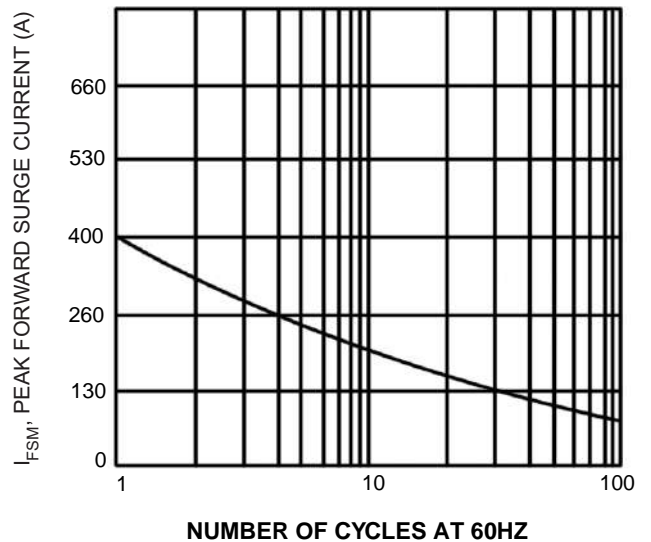

NUMBER OF CYCLES AT 60HZ  
Fig.4 Max Non-Repetitive Surge Current

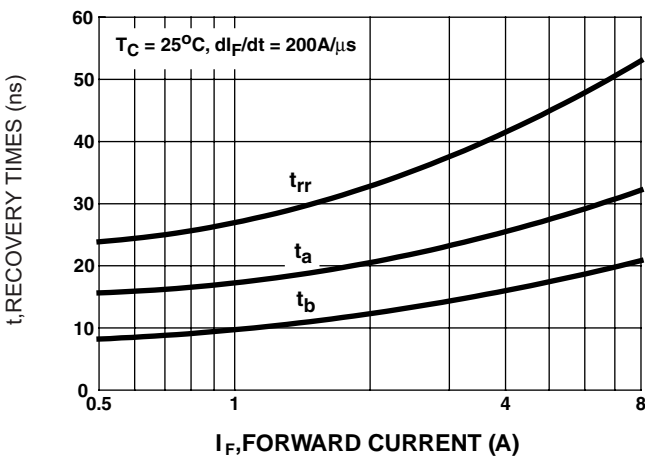


FIGURE.5  $t_{rr}$ ,  $t_a$  AND  $t_b$  CURVES vs FORWARD CURRENT

■ TO-247S PACKAGE OUTLINE DIMENSIONS

